

KEY FEATURES

Versatile, portable, and easy-to-use

360° indoor and outdoor scanning

700 m addressability

Real-time true-color acquisition

Integrated Surveying™ solution with GPS and optical total station data



BROADER BUSINESS OPPORTUNITIES

The Trimble® GS Series™ 3D Scanner captures coordinates and texture data through leading-edge technology and unique features, creating opportunities for surveying activities not possible with traditional methods or low-performance scanners. The GS Series offers extreme versatility to meet the challenges of many existing and new market opportunities. It guarantees data sets that underpin advanced and compelling deliverables via Trimble's 3D data-editing office software.

UNIQUE, POWERFUL FEATURES

Some of the powerful features offered by the GS Series include motorized indoor and outdoor scanning through 360°, and optimized performance up to 200 m (Trimble GS200™). Trimble's unique OverScan™ technology enables data capture up to 350 m (Trimble GS200).

On-board video technology provides real-time true-color acquisition, panoramic snapshot capability for enhanced scene framing, and multiple zoom factors for high-resolution image acquisition.

INCREASED PRODUCTIVITY

The GS Series' accuracy and speed, along with flexible automatic or user-definable scan parameters, can save up to 80% of time and labor resources in many surveying applications, particularly when combined with Trimble's 3D data-editing office software. With the GS Series' top adaptor, experience Trimble's Integrated Surveying solution, which combines scanning, GPS, and optical total station data for exceptional efficiency in the field and office.

Because it is compact and lightweight with fast set-up, the GS Series is extremely maneuverable in the field. One-person operation is possible, which saves labor costs even further.

The system is also WiFi-ready, and can be controlled by the Trimble Recon™ controller running the Microsoft® Pocket PC operating system. Run Trimble data collection software together with any other Pocket PC applications designed to enhance your business.

FAST RETURN ON INVESTMENT

The Trimble GS Series 3D Scanner is ideal for everyday use in a variety of applications, so you can achieve return on your investment quickly.

Further ensure your rate of return with industry-leading on-board intelligence. It offers enhanced data pre-processing, customizable parameter setting, auto-focus management, and dynamic filtering. And stay up-to-date on these and other functionalities with regular high-level firmware upgrades.

TRIMBLE GS SERIES 3D SCANNER

THE TRIMBLE GS200 AND TRIMBLE GS101 3D SCANNERS

Figures shown are for the Trimble GS200. Figures for the Trimble GS101™ are shown in parentheses.

GENERAL

Instrument type Long-range laser mapping system
 Metrology method Time of flight
 User interface Trimble Recon, Notebook PC
 Data interface Network TCP/IP, Wireless WiFi (optional)

SYSTEM PERFORMANCE

Addressability 700 m (400 m)
 Range using OverScan 2–350 m (200 m)
 Standard range 2–200 m (100 m)
 Scanning speed up to 5000 points per second
 Standard deviation

Trimble GS200 and Trimble GS101						
Range (m)	5	25	50	100	150 ¹	200 ¹
Typical values ² (mm)	1.4	1.4	1.4	2.5	3.6	6.5
99% albedo						

Multishot yes: user-definable number of shots per point
 Minimum resolution 3 mm @ 100 m (32 µrad)
 Field of view
 Horizontal 360°
 Vertical 60° (angle included)
 Laser type pulsed
 Laser color green
 Safety Class 2 (21 CFR §1041.10) / Class 3R (IEC 60825-1)
 Laser beam diameter 3 mm @ 50 m
 Autofocus yes
 On-board video 768 × 576 color resolution
 real-time video transmission
 Video zoom factor up to 5.5 times
 Video snapshot yes: automatic picture mosaic
 9 megapixels max. resolution
 Point capture modes X Y Z
 X Y Z, point orientation
 X Y Z, returned intensity (8 bits – 256 grayscale)
 X Y Z, RGB true color (8 bits per channel)
 X Y Z, orientation, returned intensity, RGB true color
 Geo-referencing yes: using standard surveying tripod

© 2005, Trimble Navigation Limited. All rights reserved. Trimble and the Globe & Triangle logo are trademarks of Trimble Navigation Limited, registered in the United States Patent and Trademark Office and in other countries. GS101, GS200, GS Series and OverScan are trademarks of Trimble Navigation Limited. Recon is a trademark of Tripod Data Systems Inc., a wholly owned subsidiary of Trimble Navigation Limited. Microsoft and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. All other trademarks are the property of their respective owners. Reorder PN 022543-119A (04/05)

PHYSICAL

Scanner
 Dimensions 340 mm D × 270 mm W × 420 mm H including handles
 Weight 13.6 kg (29.9 lb)

Power Supply Unit
 Dimensions 105 mm D × 200 mm W × 65 mm H
 Weight 1.5 kg (3.3 lb)

Transportation Box
 Dimensions 645 mm D × 490 mm W × 435 mm H (airline checkable)
 Weight 12.8 kg (28.2 lb)

Environmental
 Operating temperature 0 °C to 40 °C
 Storage temperature –20 °C to 50 °C
 Sealing IP53
 Shock 2M2 / M3 transportation standard compliant
 Humidity non-condensing atmosphere

Electrical
 Power supply AC 90 V AC–240 V AC, 50 Hz–60 Hz
 DC 24 V, nominal

Standard Accessories

Transportation transportation case (airline checkable)
 Protective window cover
 Registration targets 50 Trimble reflective targets (adhesive)
 Power AC Power supply
 Cables AC and DC power cords
 Ethernet-to-Notebook or Ethernet-to-Trimble Recon
 Trimble 3D Scanner Field Software Kit³ Trimble Recon, Notebook PC

Options


Additional registration targets Pack of 10 Trimble reflective targets
 (adhesive)
 Car battery cable kit 10 m
 Backpack

Operating System Requirements

Trimble Recon³
 Operating system Microsoft Pocket PC
 Processor 400 MHz Intel PXA250 XScale CPU
 RAM 64 MB SDRAM, 128 MB Flash storage or higher
 Notebook PC
 Operating system Microsoft Windows® XP
 (Professional or Home edition, SP1 or higher)
 Windows 2000 (SP2 or higher), Windows NT 4.0 (SP6)
 Processor 1 GHz Pentium III or similar
 (2 GHz Pentium IV or higher recommended)
 RAM 256 MB (1 GB or higher recommended)
 Display 64 MB 3D Open GL graphic board
 (128 MB or higher recommended)

1 Trimble GS200 only. Not applicable to Trimble GS101.
 2 Figures given for standard data capture of four shots, on distance measurement.
 3 The software is also compatible with HP iPAQ Pocket PC with Nexipak by Nexian.

Specifications subject to change without notice.

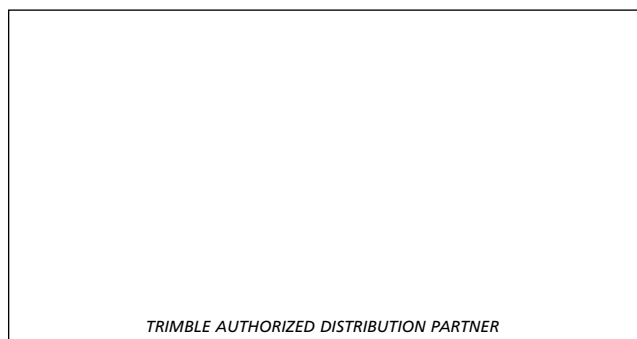

NORTH AMERICA
 Trimble Engineering & Construction Group
 5475 Kellenburger Road
 Dayton, Ohio 45424-1099 • USA
 800-538-7800 (Toll Free)
 +1-937-245-5154 Phone
 +1-937-233-9441 Fax

EUROPE
 Trimble GmbH
 Am Prime Parc 11
 65479 Raunheim • GERMANY
 +49-6142-2100-0 Phone
 +49-6142-2100-550 Fax

ASIA-PACIFIC
 Trimble Navigation
 Singapore Pty Limited
 80 Marine Parade Road
 #22-06, Parkway Parade
 Singapore 449269 • SINGAPORE
 +65-6348-2212 Phone
 +65-6348-2232 Fax



www.trimble.com